



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F, EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 2790-0314 FAX: 2790-0206



SINGLE-PHASE BRIDGE RECTIFIER

KBPC35005 THRU KBPC3510

VOLTAGE RANGE

50 to 1000 Volts

MB3505 THRU MB3510

CURRENT


35 Ampere

FEATURES

- Low cost
- This series is UL recognized under component index, file number E127707
- High forward surge current capability
- Integrally molded heatsink provide very low thermal resistance.
- High isolation voltage from case to lugs.
- High temperature soldering guaranteed: 260°C/10 second, at 5 lbs. (2.3kg) tension.

MECHANICAL DATA

- Case: Metal case
- Terminal: Plated 0.25" (6.35mm) lug.
- Polarity: Polarity symbols marked on case.
- Mounting: Thru hole for #10 screw, 20 in,- lbs. Torqute Max.
- Weight: 1.02 ounce, 29gram

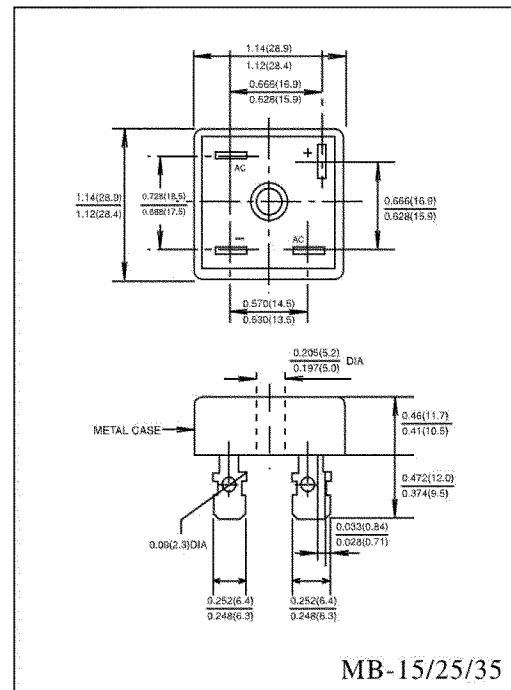

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	KBPC	UNIT
		35005	3501	3502	3504	3506	3508	3510	
		MB3505	MB351	MB352	MB354	MB356	MB358	MB3510	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at $T_C = 50^\circ C$ (Note 1,2)	$I_{(AV)}$	35							Amps
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method)	I_{FSM}	400							Amps
Rating for Fusing ($t < 8.3ms$)	I^2t	664							A^2s
Maximum Instantaneous Forward Voltage Drop per bridge element at 17.5A	V_F	1.1							Volts
Maximum DC Reverse Current at rate DC blocking voltage per element	I_R	$T_A = 25^\circ C$							μA
		$T_A = 100^\circ C$							mA
Isolation Voltage from case to lugs.	V_{ISO}	2500							V_{AC}
Typical Thermal Resistance (Note 1,2)	$R_{\theta JC}$	2.0							$^\circ C/W$
Operating Temperature Range	T_J	(-65 to +150)							$^\circ C$
Storage Temperature Range	T_{STG}	(-65 to +150)							

1. Unit mounted on 9" X 3.5" X 4.6" (23cm X 9cm X 11.8cm)Al. finned Plate.

2 Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F, EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.
TEL: 2790-0314 FAX: 2790-0206

RATINGS AND CHARACTERISTIC CURVES

KBPC35005 THRU KBPC3510
MB3505 MB3510

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

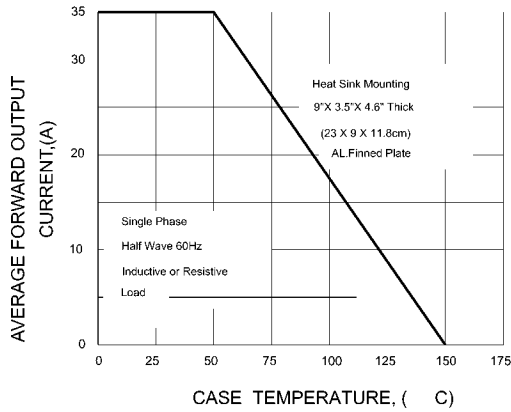


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER ELEMENT

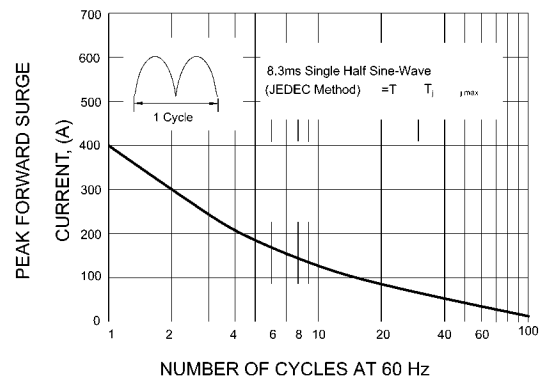


FIG.3-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

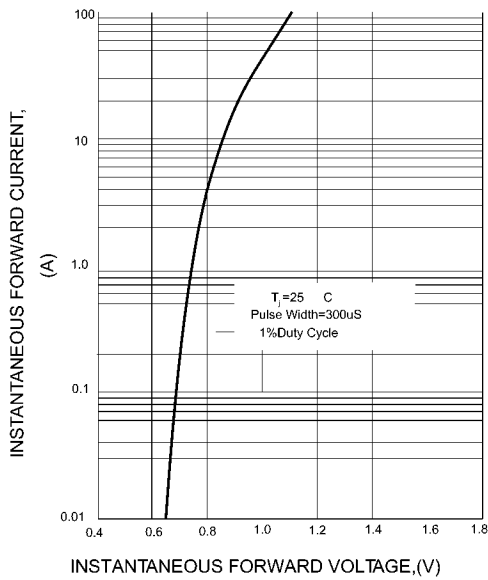


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

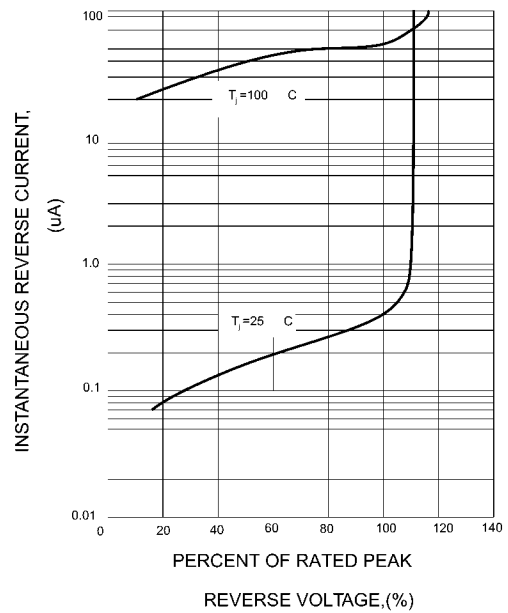


FIG.5-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

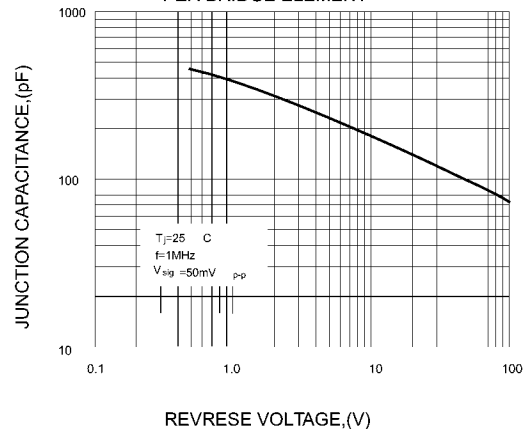


FIG.6-MAXIMUM POWER DISSIPATION

