



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206



MMBTRA101SS...MMBTRA106SS

PNP Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit applications

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process




1. Base 2. Emitter 3. Collector
SOT-23 Plastic Package

Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRA101SS	4.7	4.7
MMBTRA102SS	10	10
MMBTRA103SS	22	22
MMBTRA104SS	47	47
MMBTRA105SS	2.2	47
MMBTRA106SS	4.7	47

Absolute Maximum Ratings (T_a = 25 °C)

Parameter		Symbol	Value	Unit
Output Voltage		-V _O	50	V
Input Voltage	MMBTRA101SS	-V _I	20, -10	V
	MMBTRA102SS		30, -10	
	MMBTRA103SS		40, -10	
	MMBTRA104SS		40, -10	
	MMBTRA105SS		12, -5	
	MMBTRA106SS		20, -5	
Output Current		-I _O	100	mA
Total Power Dissipation		P _{tot}	200	mW
Junction Temperature		T _j	150	°C
Storage Temperature Range		T _{stg}	- 55 to + 150	°C





FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRA101SS...MMBTRA106SS

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $-V_O = 5\text{ V}$, $-I_O = 10\text{ mA}$	MMBTRA101SS MMBTRA102SS MMBTRA103SS MMBTRA104SS MMBTRA105SS MMBTRA106SS	G_I	30 50 70 80 80 80	- - - - - -	- - - - - -	- - - - - -
Output Cutoff Current at $-V_O = 50\text{ V}$		$-I_{O(OFF)}$	-	-	500	nA
Input Current at $-V_I = 5\text{ V}$	MMBTRA101SS MMBTRA102SS MMBTRA103SS MMBTRA104SS MMBTRA105SS MMBTRA106SS	$-I_I$	- - - - - -	- - - - - -	1.8 0.88 0.36 0.18 3.6 1.8	mA
Output Voltage at $-I_O = 10\text{ mA}$, $-I_I = 0.5\text{ mA}$		$-V_{O(ON)}$	-	-	0.3	V
Input Voltage (ON) at $-V_O = 0.2\text{ V}$, $-I_O = 5\text{ mA}$	MMBTRA101SS MMBTRA102SS MMBTRA103SS MMBTRA104SS MMBTRA105SS MMBTRA106SS	$-V_{I(ON)}$	- - - - - -	- - - - - -	2 2.4 3 5 1.1 1.3	V
Input Voltage (OFF) at $-V_O = 5\text{ V}$, $-I_O = 0.1\text{ mA}$	MMBTRA101SS~104SS MMBTRA105SS~106SS	$-V_{I(OFF)}$	1 0.5	- -	- -	V
Transition Frequency at $-V_O = 10\text{ V}$, $-I_O = 5\text{ mA}$		$f_T^{1)}$	-	200	-	MHz

¹⁾ Characteristic of transistor only.












FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRA101SS...MMBTRA106SS

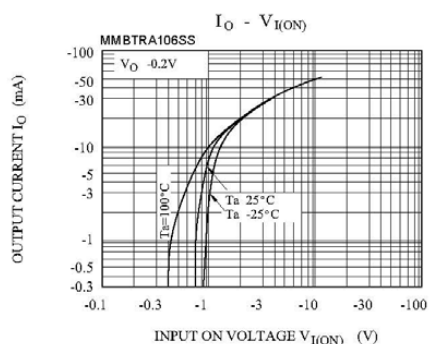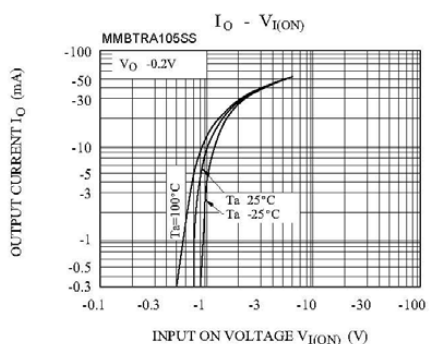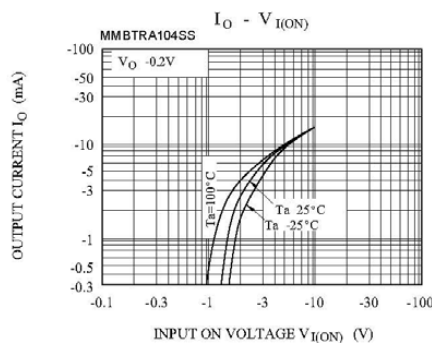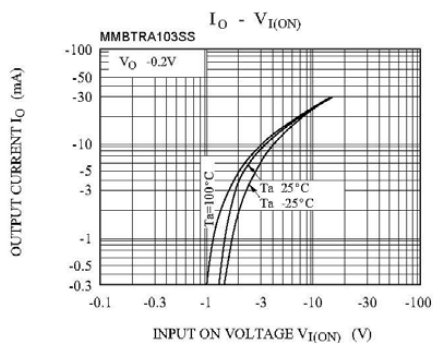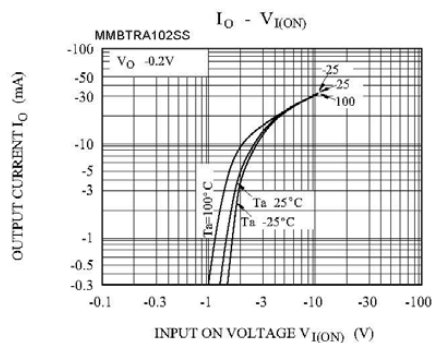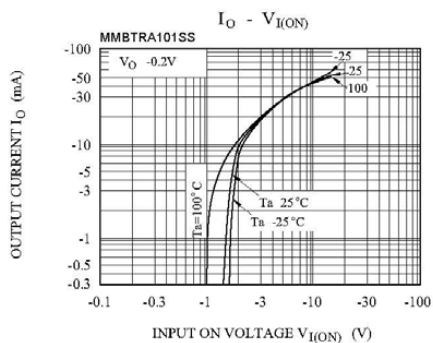










FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRA101SS...MMBTRA106SS

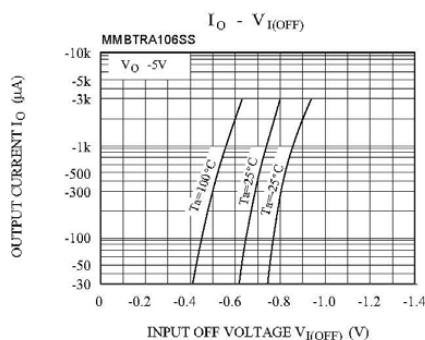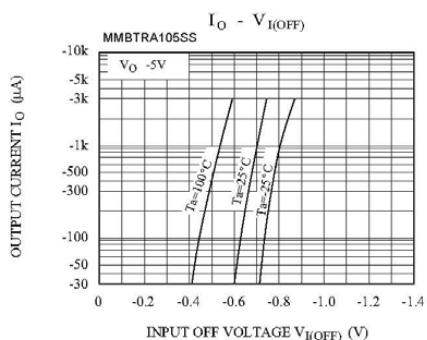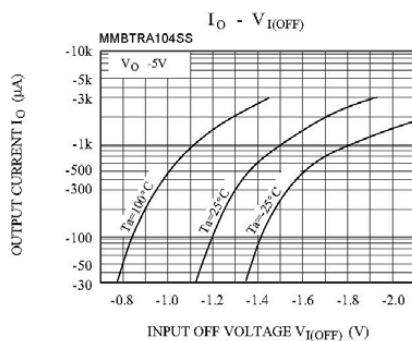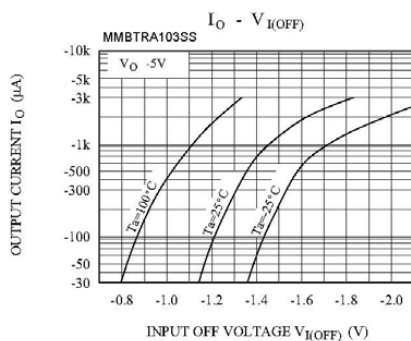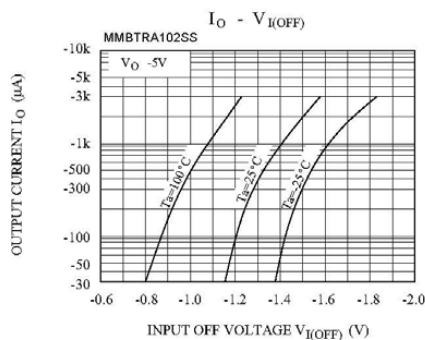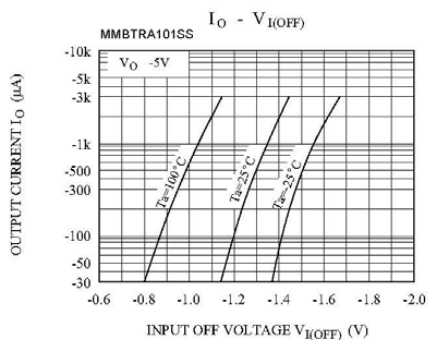



FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRA101SS...MMBTRA106SS

