



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRC101SS...MMBTRC106SS



NPN Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit

applications

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

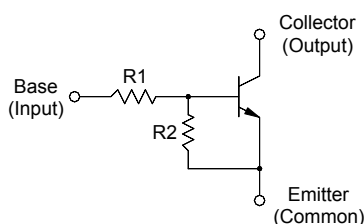


1. Base 2. Emitter 3. Collector
SOT-23 Plastic Package

Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC101SS	4.7	4.7
MMBTRC102SS	10	10
MMBTRC103SS	22	22
MMBTRC104SS	47	47
MMBTRC105SS	2.2	47
MMBTRC106SS	4.7	47

Absolute Maximum Ratings (T_a = 25 °C)

Parameter		Symbol	Value	Unit
Output Voltage		V _o	50	V
Input Voltage	MMBTRC101SS	V _i	20, -10	V
	MMBTRC102SS		30, -10	
	MMBTRC103SS		40, -10	
	MMBTRC104SS		40, -10	
	MMBTRC105SS		12, -5	
	MMBTRC106SS		20, -5	
Output Current		I _o	100	mA
Total Power Dissipation		P _{tot}	200	mW
Junction Temperature		T _j	150	°C
Storage Temperature Range		T _{stg}	- 55 to + 150	°C





FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRC101SS...MMBTRC106SS

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_o = 5\text{ V}$, $I_o = 10\text{ mA}$	MMBTRC101SS MMBTRC102SS MMBTRC103SS MMBTRC104SS MMBTRC105SS MMBTRC106SS	G_i	30 50 70 80 80 80	- - - - - -	- - - - - -
Output Cutoff Current at $V_o = 50\text{ V}$		$I_{O(OFF)}$	-	-	500 nA
Input Current at $V_i = 5\text{ V}$	MMBTRC101SS MMBTRC102SS MMBTRC103SS MMBTRC104SS MMBTRC105SS MMBTRC106SS	I_i	- - - - - -	- - - - - -	1.8 0.88 0.36 0.18 3.6 1.8 mA
Output Voltage at $I_o = 10\text{ mA}$, $I_i = 0.5\text{ mA}$		$V_{O(ON)}$	-	-	0.3 V
Input Voltage (ON) at $V_o = 0.2\text{ V}$, $I_o = 5\text{ mA}$	MMBTRC101SS MMBTRC102SS MMBTRC103SS MMBTRC104SS MMBTRC105SS MMBTRC106SS	$V_{I(ON)}$	- - - - - -	- - - - - -	2 2.4 3 5 1.1 1.3 V
Input Voltage (OFF) at $V_o = 5\text{ V}$, $I_o = 0.1\text{ mA}$	MMBTRC101SS~104SS MMBTRC105SS~106SS	$V_{I(OFF)}$	1 0.5	- -	- - V
Transition Frequency at $V_o = 10\text{ V}$, $I_o = 5\text{ mA}$		$f_T^{1)}$	-	200	- MHz

¹⁾ Characteristic of transistor only.












FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRC101SS...MMBTRC106SS

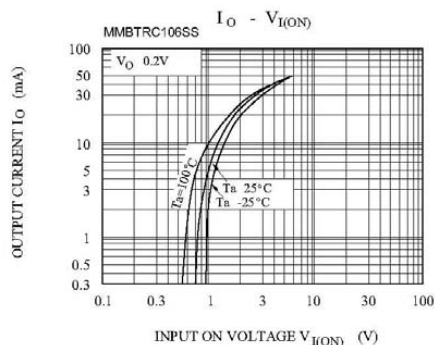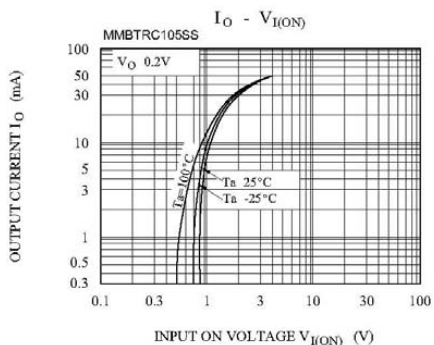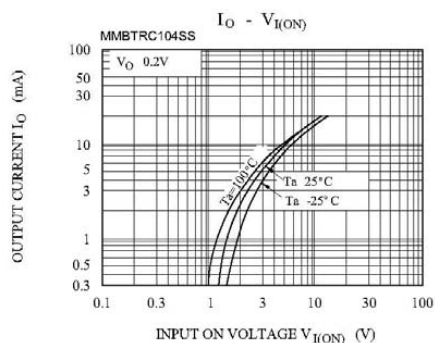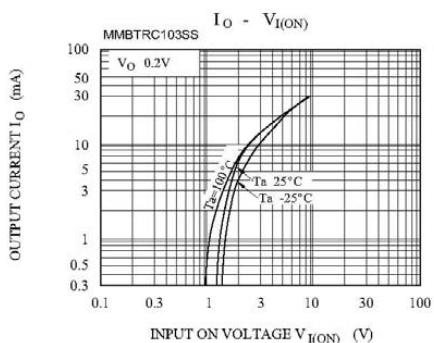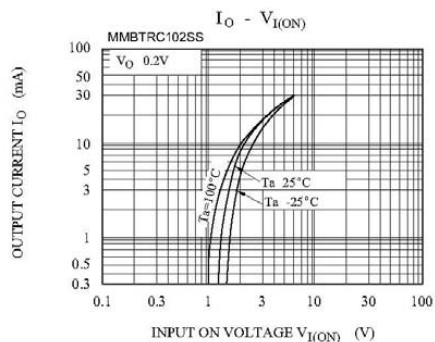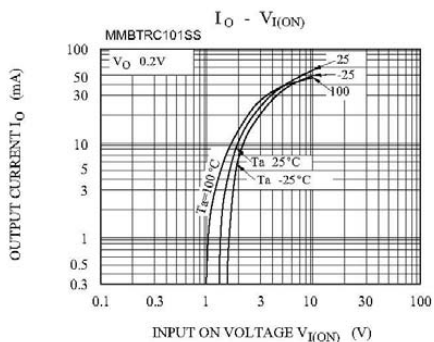










FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRC101SS...MMBTRC106SS

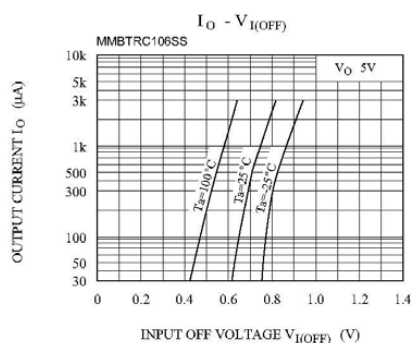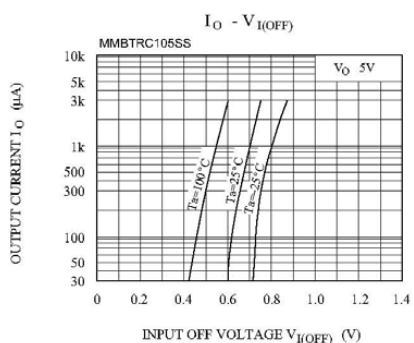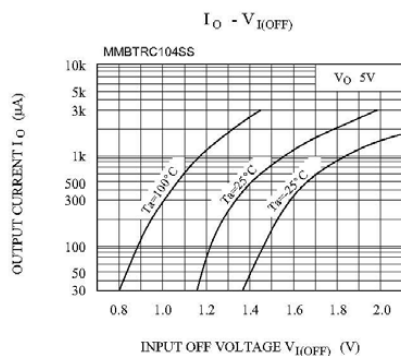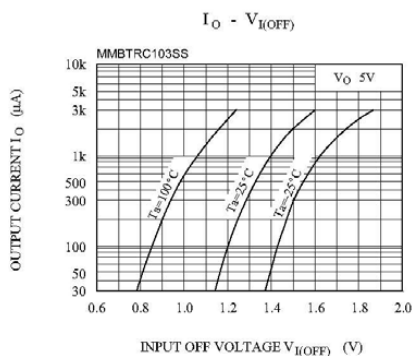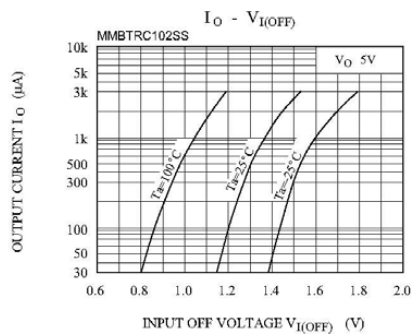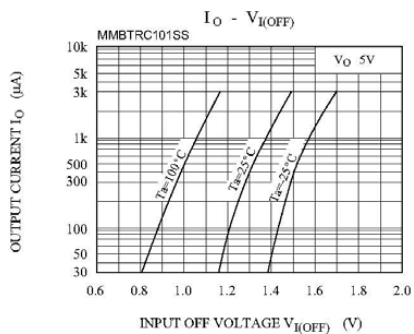



FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTRC101SS...MMBTRC106SS

