



FUKUCOM COMPANY LTD.

福靈有限公司


FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SD882T

NPN Silicon Power Transistor

The transistor is subdivided into four groups, R, Q, P and E, according to its DC current gain.




TO-126 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current	I_C	3	A
Collector Current (pulse)	$I_C(\text{pulse})$	7	A
Total power dissipation ($T_a = 25^\circ\text{C}$)	P_{tot}	1	W
Total power dissipation ($T_c = 25^\circ\text{C}$)	P_{tot}	10	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_{CE} = 2\text{ V}$, $I_C = 1\text{ A}$						
Current Gain Group	R	h_{FE}	60	-	120	-
	Q	h_{FE}	100	-	200	-
	P	h_{FE}	160	-	320	-
	E	h_{FE}	200	-	400	-
at $V_{CE} = 2\text{ V}$, $I_C = 20\text{ mA}$						
		h_{FE}	30	-	-	-
Collector Cutoff Current at $V_{CB} = 30\text{ V}$	I_{CBO}	-	-	1	μA	
Emitter Cutoff Current at $V_{EB} = 3\text{ V}$	I_{EBO}	-	-	1	μA	
Output Capacitance $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	45	-	pF	
Base Emitter Saturation Voltage at $I_C = 2\text{ A}$, $I_B = 0.2\text{ A}$	$V_{BE(\text{sat})}$	-	-	2	V	
Collector Emitter Saturation Voltage at $I_C = 2\text{ A}$, $I_B = 0.2\text{ A}$	$V_{CE(\text{sat})}$	-	-	0.5	V	
Gain Bandwidth Product at $V_{CE} = 5\text{ V}$, $I_C = 0.1\text{ A}$	f_T	-	90	-	MHz	



SEMTECH

Dated : 22/03/2006



FUKUCOM COMPANY LTD.











福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SD882T

TYPICAL CHARACTERISTICS (Ta=25°C)

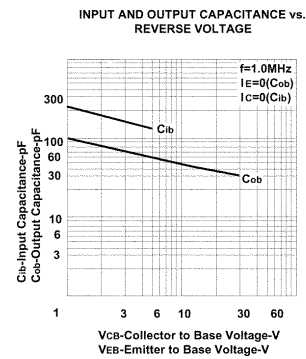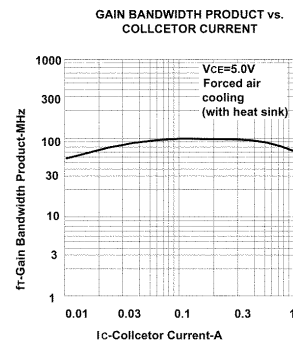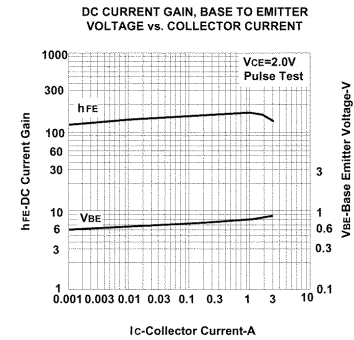

SEMTECH

Dated : 22/03/2006