



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.
TEL: 852-2790 0314 FAX: 852-2790 0206


ST 9018

NPN Silicon Epitaxial Planar Transistor

for AM/FM amplifier and local oscillator of
FM/VHF tuner applications.

The transistor is subdivided into six groups, D,
E, F, G, H and I, according to its DC current
gain.

On special request, these transistors can be
manufactured in different pin configurations.



1. Emitter 2. Base 3. Collector


TO-92 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	30	V
Collector Emitter Voltage	V_{CEO}	15	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	50	mA
Power Dissipation	P_{tot}	400	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_s	-55 to +150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_{CE} = 5\text{ V}$, $I_C = 1\text{ mA}$ Current Gain Group	D	h_{FE}	28	-	45	-
	E	h_{FE}	39	-	60	-
	F	h_{FE}	54	-	80	-
	G	h_{FE}	72	-	108	-
	H	h_{FE}	97	-	146	-
	I	h_{FE}	132	-	198	-
Collector Base Breakdown Voltage at $I_C = 100\ \mu\text{A}$	$V_{(BR)CBO}$	30	-	-	V	
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CEO}$	15	-	-	V	
Emitter Base Breakdown Voltage at $I_E = 100\ \mu\text{A}$	$V_{(BR)EBO}$	5	-	-	V	
Collector Cutoff Current at $V_{CB} = 12\text{ V}$	I_{CBO}	-	-	50	nA	
Collector Emitter Saturation Voltage at $I_C = 10\text{ mA}$, $I_B = 1\text{ mA}$	$V_{CE(sat)}$	-	-	0.5	V	
Collector Base Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{CBO}	-	1.3	1.7	pF	
Gain Bandwidth Product at $V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$	f_T	700	1100	-	MHz	



SEMTECH

Dated : 23/12/2005



FUKUCOM COMPANY LTD.


福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

ST 9018


STATIC CHARACTERISTIC

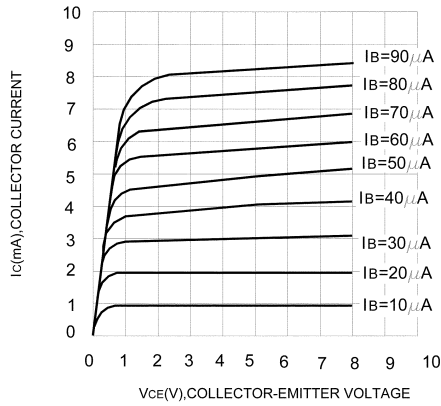


DC CURRENT GAIN

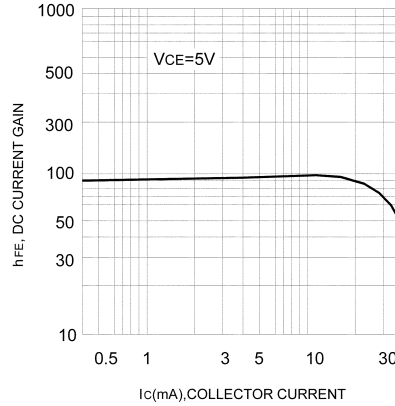



CURRENT GAIN-BANDWIDTH PRODUCT

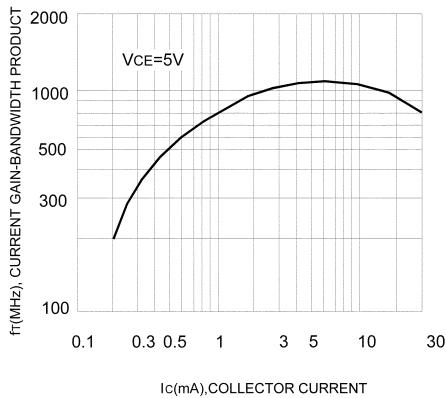

BASE-EMITTER SATURATION VOLTAGE
COLLECTOR-EMITTER SATURATION VOLTAGE

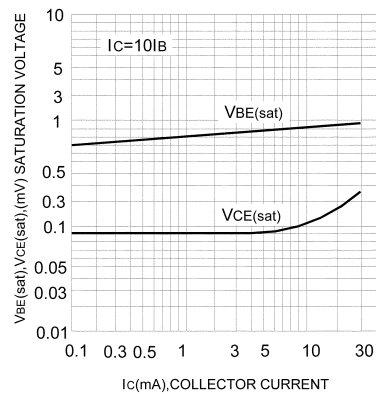

OUTPUT CAPACITANCE

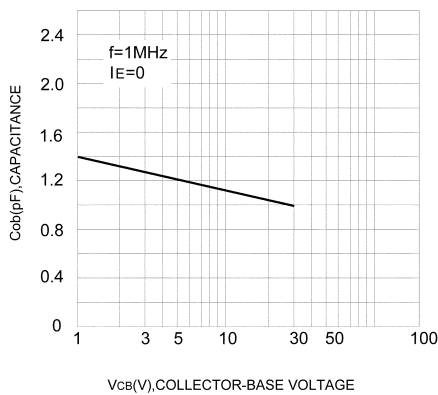

SEMTECH

Dated : 23/12/2005