



# FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

## MMBTA92 / MMBTA93

### PNP Silicon High Voltage Transistors

for high voltage switching and amplifier applications.

As complementary types the NPN transistors  
MMBTA42 and MMBTA43 are recommended.




1. Base 2. Emitter 3. Collector  
SOT-23 Plastic Package

### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit	
Collector Base Voltage	MMBTA92 MMBTA93	$-V_{CBO}$	300 200	V
Collector Emitter Voltage	MMBTA92 MMBTA93	$-V_{CEO}$	300 200	V
Emitter Base Voltage		$-V_{EBO}$	5	V
Collector Current		$-I_C$	500	mA
Total Power Dissipation		$P_{tot}$	350	mW
Junction Temperature		$T_j$	150	$^\circ\text{C}$
Storage Temperature Range		$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	
DC Current Gain					
at $-V_{CE} = 10\text{ V}$ , $-I_C = 1\text{ mA}$	$h_{FE}$	25	-	-	
at $-V_{CE} = 10\text{ V}$ , $-I_C = 10\text{ mA}$	$h_{FE}$	40	-	-	
at $-V_{CE} = 10\text{ V}$ , $-I_C = 30\text{ mA}$	$h_{FE}$	25	-	-	
Collector Base Cutoff Current					
at $-V_{CB} = 200\text{ V}$	MMBTA92	$-I_{CBO}$	-	0.25	$\mu\text{A}$
at $-V_{CB} = 160\text{ V}$	MMBTA93	$-I_{CBO}$	-	0.25	$\mu\text{A}$
Emitter Base Cutoff Current					
at $-V_{EB} = 3\text{ V}$		$-I_{EBO}$	-	0.1	$\mu\text{A}$
Collector Base Breakdown Voltage					
at $-I_C = 100\text{ }\mu\text{A}$	MMBTA92	$-V_{(BR)CBO}$	300	-	V
	MMBTA93	$-V_{(BR)CBO}$	200	-	V
Collector Emitter Breakdown Voltage					
at $-I_C = 1\text{ mA}$	MMBTA92	$-V_{(BR)CEO}$	300	-	V
	MMBTA93	$-V_{(BR)CEO}$	200	-	V
Emitter Base Breakdown Voltage					
at $-I_E = 100\text{ }\mu\text{A}$		$-V_{(BR)EBO}$	5	-	V
Collector Emitter Saturation Voltage					
at $-I_C = 20\text{ mA}$ , $-I_B = 2\text{ mA}$		$-V_{CE(sat)}$	-	0.5	V
Base Emitter Saturation Voltage					
at $-I_C = 20\text{ mA}$ , $-I_B = 2\text{ mA}$		$-V_{BE(sat)}$	-	0.9	V
Current Gain Bandwidth Product					
at $-V_{CE} = 20\text{ V}$ , $-I_C = 10\text{ mA}$ , $f = 100\text{ MHz}$		$f_T$	50	-	MHz
Collector Base Capacitance					
at $-V_{CB} = 20\text{ V}$ , $f = 1\text{ MHz}$	MMBTA92	$C_{cb}$	-	6	pF
	MMBTA93	$C_{cb}$	-	8	pF



Dated : 18/06/2009








FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

MMBTA92 / MMBTA93

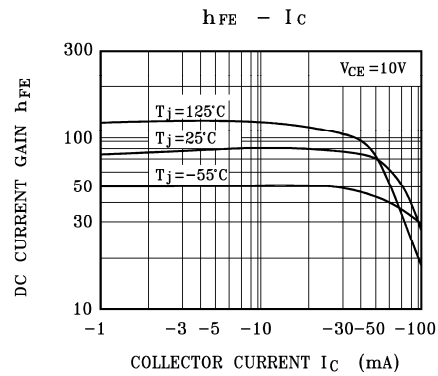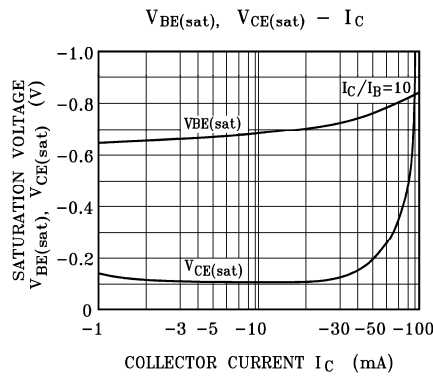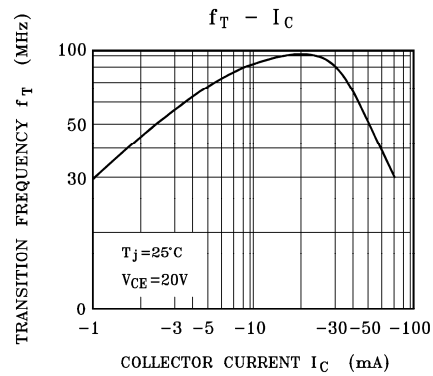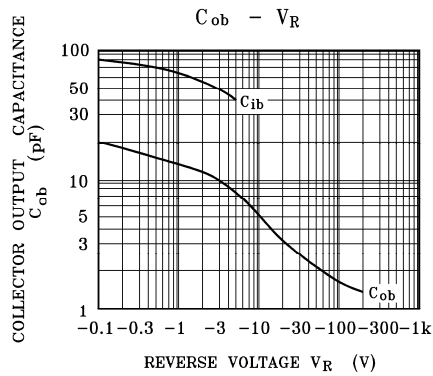

Dated : 18/06/2009