



# FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

## MMBTSC4226


### NPN Silicon Epitaxial Planar Transistor

High Frequency Low Noise Amplifier.

The transistor is subdivided into three groups, Q, R and S, according to its DC current gain.

#### Features:

- Low Noise  
NF=1.2dB TYP. @ f=1GHz,  $V_{CE}=3V$ ,  $I_C=7mA$
- High Gain  
 $|S_{21e}|^2 = 9.0dB$  TYP. @ f=1GHz,  $V_{CE}=3V$ ,  $I_C=7mA$



1. Base 2. Emitter 3. Collector


SOT-23 Plastic Package

#### Description:

The MMBTSC4226 is a low supply voltage transistor designed for VHF, UHF low noise amplifier.

#### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	20	V
Collector Emitter Voltage	$V_{CEO}$	12	V
Emitter Base Voltage	$V_{EBO}$	3	V
Collector Current	$I_C$	100	mA
Total Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_s$	-65 to +150	$^\circ\text{C}$



Dated : 20/10/2005



# FUKUCOM COMPANY LTD.

## 福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

### MMBTSC4226


#### Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE}=3\text{V}$ , $I_C=7\text{mA}$					
Current Gain Group Q	$h_{FE}$	50	-	100	-
R	$h_{FE}$	80	-	160	-
S	$h_{FE}$	125	-	250	-
Collector Cutoff Current at $V_{CB}=10\text{V}$	$I_{CBO}$	-	-	1.0	$\mu\text{A}$
Emitter Cutoff Current at $V_{EB}=1\text{V}$	$I_{EBO}$	-	-	1.0	$\mu\text{A}$
Gain Bandwidth Product at $V_{CE}=3\text{V}$ , $I_C=7\text{mA}$	$f_T$	3.0	4.5	-	GHz
Feed back Capacitance <sup>1)</sup> at $V_{CE}=3\text{V}$ , $f=1\text{MHz}$	$C_{re}$	-	0.7	1.5	pF
Insertion Power Gain at $V_{CE}=3\text{V}$ , $I_C=7\text{mA}$ , $f=1\text{GHz}$	$ S_{21e} ^2$	7	9	-	dB
Noise Figure at $V_{CE}=3\text{V}$ , $I_C=7\text{mA}$ , $f=1\text{GHz}$	NF	-	1.2	2.5	dB

<sup>1)</sup> Measured with 3 terminal bridge, Emitter and case should be grounded.

#### Classification of $h_{FE}$

RANK	Q	R	S
MARKING	R23	R24	R25
$h_{FE}$	50 ~100	80 ~160	125 ~250



Dated : 20/10/2005










# FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

## MMBTSC4226

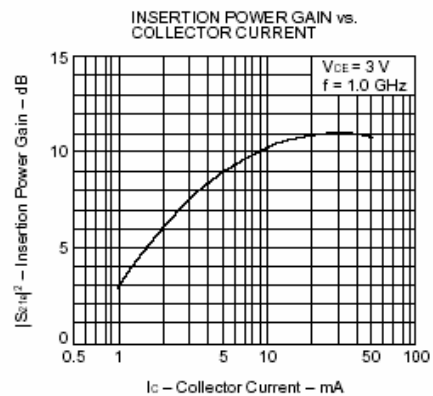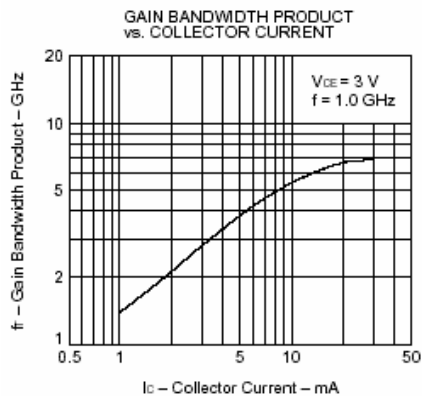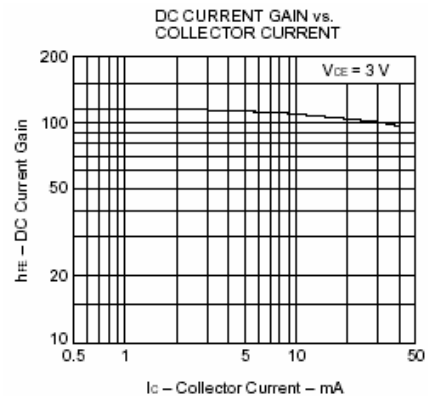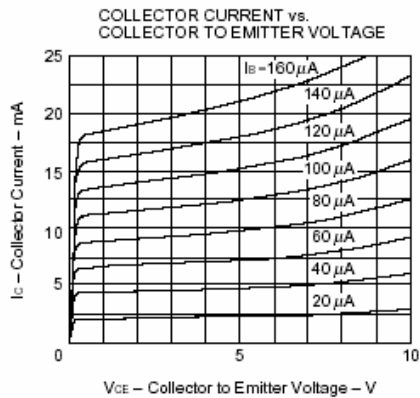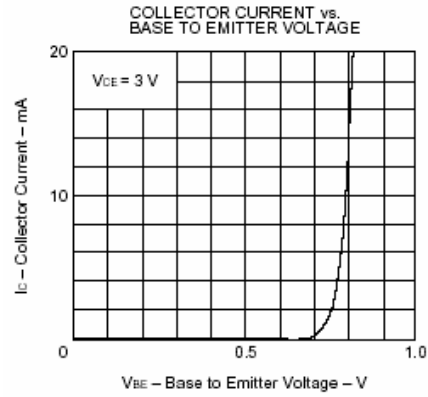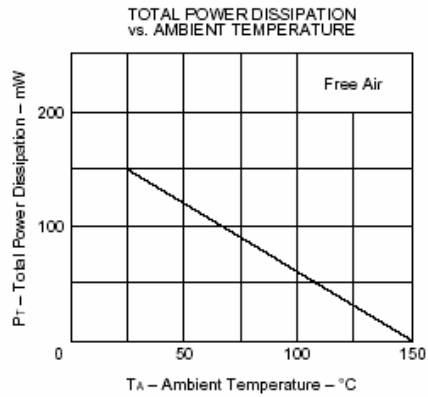







# FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,  
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

## MMBTSC4226

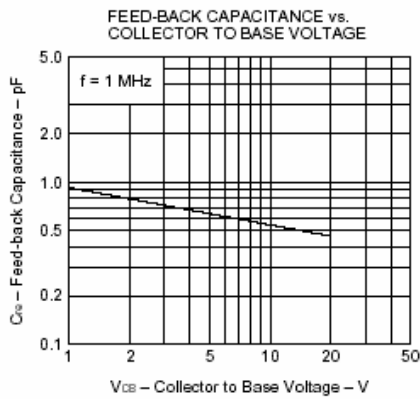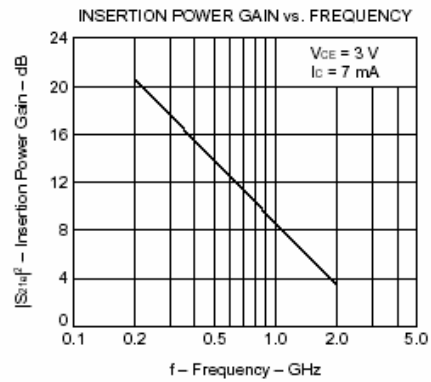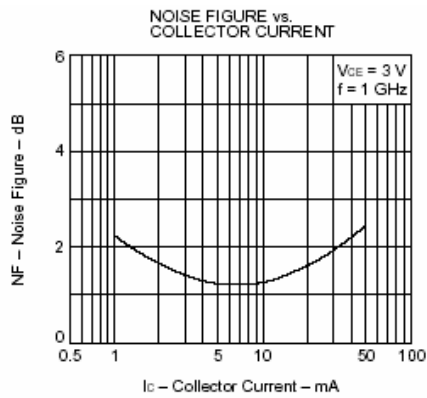

Dated : 20/10/2005