



FUKUCOM COMPANY LTD.


福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ZMM...HS Series

Silicon Epitaxial Planar Zener Diodes

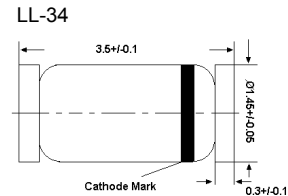

Glass case MiniMELF
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Power Dissipation	P_{tot}	500 ¹⁾	mW
Junction Temperature	T_j	175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 175	$^\circ\text{C}$

¹⁾ Valid provided that electrodes are kept at ambient temperature


Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	R_{thA}	0.3 ¹⁾	K/mW
Forward Voltage at $I_F = 100\text{ mA}$	V_F	1	V

¹⁾ Valid provided that electrodes are kept at ambient temperature

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Zener Voltage ¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V_Z		at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMM2V0HS	1.88	2.2	5	100	5	120	0.5
ZMM2V0HSA	1.88	2.1	5	100	5	120	0.5
ZMM2V0HSB	2.02	2.2	5	100	5	120	0.5
ZMM2V2HS	2.12	2.41	5	100	5	120	0.7
ZMM2V2HSA	2.12	2.3	5	100	5	120	0.7
ZMM2V2HSB	2.22	2.41	5	100	5	120	0.7
ZMM2V4HS	2.33	2.63	5	100	5	120	1
ZMM2V4HSA	2.33	2.52	5	100	5	120	1
ZMM2V4HSB	2.43	2.63	5	100	5	120	1
ZMM2V7HS	2.54	2.91	5	110	5	100	1
ZMM2V7HSA	2.54	2.75	5	110	5	100	1
ZMM2V7HSB	2.69	2.91	5	110	5	100	1
ZMM3V0HS	2.85	3.22	5	120	5	50	1
ZMM3V0HSA	2.85	3.07	5	120	5	50	1
ZMM3V0HSB	3.01	3.22	5	120	5	50	1



Dated : 18/07/2009



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司


FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ZMM...HS Series

Characteristics at T_a = 25 °C

Type	Zener Voltage ¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V _Z		at I _{ZT}	Z _{ZT}	at I _{ZT}	I _R	at V _R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMM3V3HS	3.16	3.53	5	120	5	20	1
ZMM3V3HSA	3.16	3.38	5	120	5	20	1
ZMM3V3HSB	3.32	3.53	5	120	5	20	1
ZMM3V6HS	3.47	3.83	5	120	5	10	1
ZMM3V6HSA	3.47	3.68	5	120	5	10	1
ZMM3V6HSB	3.62	3.83	5	120	5	10	1
ZMM3V9HS	3.77	4.14	5	120	5	5	1
ZMM3V9HSA	3.77	3.98	5	120	5	5	1
ZMM3V9HSB	3.92	4.14	5	120	5	5	1
ZMM4V3HS	4.05	4.53	5	120	5	5	1
ZMM4V3HSA	4.05	4.26	5	120	5	5	1
ZMM4V3HSB	4.2	4.4	5	120	5	5	1
ZMM4V3HSC	4.34	4.53	5	120	5	5	1
ZMM4V7HS	4.47	4.91	5	100	5	5	1
ZMM4V7HSA	4.47	4.65	5	100	5	5	1
ZMM4V7HSB	4.59	4.77	5	100	5	5	1
ZMM4V7HSC	4.71	4.91	5	100	5	5	1
ZMM5V1HS	4.85	5.35	5	70	5	5	1.5
ZMM5V1HSA	4.85	5.03	5	70	5	5	1.5
ZMM5V1HSB	4.97	5.18	5	70	5	5	1.5
ZMM5V1HSC	5.12	5.35	5	70	5	5	1.5
ZMM5V6HS	5.29	5.88	5	40	5	5	2.5
ZMM5V6HSA	5.29	5.52	5	40	5	5	2.5
ZMM5V6HSB	5.46	5.7	5	40	5	5	2.5
ZMM5V6HSC	5.64	5.88	5	40	5	5	2.5
ZMM6V2HS	5.81	6.4	5	30	5	5	3
ZMM6V2HSA	5.81	6.06	5	30	5	5	3
ZMM6V2HSB	5.99	6.24	5	30	5	5	3
ZMM6V2HSC	6.16	6.4	5	30	5	5	3
ZMM6V8HS	6.32	6.97	5	25	5	2	3.5
ZMM6V8HSA	6.32	6.59	5	25	5	2	3.5
ZMM6V8HSB	6.52	6.79	5	25	5	2	3.5
ZMM6V8HSC	6.7	6.97	5	25	5	2	3.5
ZMM7V5HS	6.88	7.64	5	25	5	0.5	4
ZMM7V5HSA	6.88	7.19	5	25	5	0.5	4
ZMM7V5HSB	7.11	7.41	5	25	5	0.5	4
ZMM7V5HSC	7.33	7.64	5	25	5	0.5	4
ZMM8V2HS	7.56	8.41	5	20	5	0.5	5
ZMM8V2HSA	7.56	7.9	5	20	5	0.5	5
ZMM8V2HSB	7.82	8.15	5	20	5	0.5	5
ZMM8V2HSC	8.07	8.41	5	20	5	0.5	5
ZMM9V1HS	8.33	9.29	5	20	5	0.5	6
ZMM9V1HSA	8.33	8.7	5	20	5	0.5	6
ZMM9V1HSB	8.61	8.99	5	20	5	0.5	6
ZMM9V1HSC	8.89	9.29	5	20	5	0.5	6



Dated : 18/07/2009



FUKUCOM COMPANY LTD.

福靈有限公司


FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD, KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ZMM...HS Series

Characteristics at T_a = 25 °C

Table with 8 columns: Type, Zener Voltage (Min. (V), Max. (V)), at I_ZT (mA), Dynamic Resistance (Max. (Ω)), at I_ZT (mA), Reverse Leakage Current (Max. (μA)), at V_R (V). Rows include models like ZMM10HS, ZMM11HS, ZMM12HS, ZMM13HS, ZMM15HS, ZMM16HS, ZMM18HS, ZMM20HS, ZMM22HS, ZMM24HS, ZMM27HS.



Dated : 18/07/2009



FUKUCOM COMPANY LTD.

福靈有限公司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.




TEL: 852-2790 0314 FAX: 852-2790 0206

ZMM...HS Series

Characteristics at $T_a = 25^\circ\text{C}$

Type	Zener Voltage ¹⁾			Dynamic Resistance		Reverse Leakage Current	
	V_Z		at I_{ZT}	Z_{ZT}	at I_{ZT}	I_R	at V_R
	Min. (V)	Max. (V)	(mA)	Max. (Ω)	(mA)	Max. (μA)	(V)
ZMM27HSC	25.63	26.95	5	45	5	0.2	21
ZMM27HSD	26.29	27.64	5	45	5	0.2	21
ZMM30HS	26.99	30.51	5	55	5	0.2	23
ZMM30HSA	26.99	28.39	5	55	5	0.2	23
ZMM30HSB	27.7	29.13	5	55	5	0.2	23
ZMM30HSC	28.36	29.82	5	55	5	0.2	23
ZMM30HSD	29.02	30.51	5	55	5	0.2	23
ZMM33HS	29.68	33.11	5	65	5	0.2	25
ZMM33HSA	29.68	31.22	5	65	5	0.2	25
ZMM33HSB	30.32	31.88	5	65	5	0.2	25
ZMM33HSC	30.9	32.5	5	65	5	0.2	25
ZMM33HSD	31.49	33.11	5	65	5	0.2	25
ZMM36HS	32.14	35.77	5	75	5	0.2	27
ZMM36HSA	32.14	33.79	5	75	5	0.2	27
ZMM36HSB	32.79	34.49	5	75	5	0.2	27
ZMM36HSC	33.4	35.13	5	75	5	0.2	27
ZMM36HSD	34.01	35.77	5	75	5	0.2	27
ZMM39HS	34.68	38.52	5	85	5	0.2	30
ZMM39HSA	34.68	36.47	5	85	5	0.2	30
ZMM39HSB	35.36	37.19	5	85	5	0.2	30
ZMM39HSC	36	37.85	5	85	5	0.2	30
ZMM39HSD	36.63	38.52	5	85	5	0.2	30

¹⁾ Tested with pulse $t_p = 20\text{ ms}$

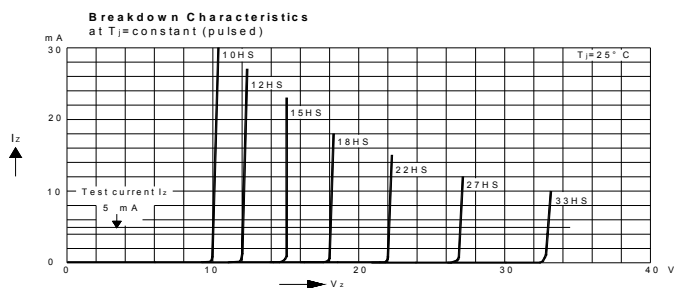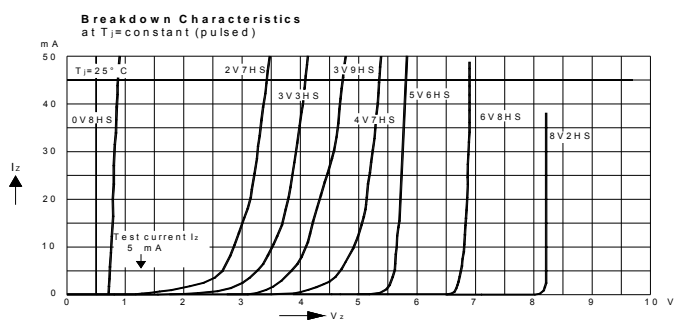

Dated : 18/07/2009