



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.


TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SC1383 / 2SC1384

NPN Silicon Epitaxial Planar Transistor

For low-frequency power amplification and driver Amplification. Complementary to 2SA683 to and 2SA684.

On special request, these transistors can be manufactured in different pin configurations.




1. Emitter 2. Collector 3. Base

TO-92 Plastic Package
Weight approx. 0.19g

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

	Symbol	Value	Unit	
Collector Base Voltage	2SC1383	V_{CB0}	30	V
	2SC1384	V_{CB0}	60	V
Collector Emitter Voltage	2SC1383	V_{CEO}	25	V
	2SC1384	V_{CEO}	50	V
Emitter Base Voltage		V_{EBO}	5	V
Peak Collector Current		I_{CP}	1.5	A
Collector Current		I_C	1	A
Power Dissipation		P_{tot}	1	W
Junction Temperature		T_j	150	$^\circ\text{C}$
Storage Temperature Range		T_s	-55 to +150	$^\circ\text{C}$



Dated : 07/12/2002



FUKUCOM COMPANY LTD.

福 靈 有 限 公 司


FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SC1383 / 2SC1384

Characteristics at $T_{amb}=25\text{ }^{\circ}\text{C}$

	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $I_C=500\text{mA}$, $V_{CE}=10\text{V}$	Q	h_{FE}	85	-	170	-
	R	h_{FE}	120	-	240	-
	S	h_{FE}	170	-	340	-
		h_{FE}	50	100	-	-
at $I_C=1\text{A}$, $V_{CE}=5\text{V}$						
Collector Cutoff Current at $V_{CB}=20\text{V}$	I_{CBO}	-	-	0.1	μA	
Collector Base Voltage at $I_C=10\mu\text{A}$	2SC1383	V_{CBO}	30	-	-	V
	2SC1384	V_{CBO}	60	-	-	V
Collector Emitter Voltage at $I_C=2\text{mA}$	2SC1383	V_{CEO}	25	-	-	V
	2SC1384	V_{CEO}	50	-	-	V
Emitter Base Voltage at $I_E=10\mu\text{A}$	V_{EBO}	5	-	-	V	
Collector Saturation Voltage at $I_C=500\text{mA}$, $I_B=50\text{mA}$	$V_{CE(sat)}$	-	0.2	0.4	V	
Base Saturation Voltage at $I_C=500\text{mA}$, $I_B=50\text{mA}$	$V_{BE(sat)}$	-	0.85	1.2	V	
Gain Bandwidth Product at $V_{CB}=10\text{V}$, $I_E=-50\text{mA}$, $f=200\text{MHz}$	f_T	-	200	-	MHz	
Output Capacitance at $V_{CB}=10\text{V}$, $f=1\text{MHz}$	C_{OB}	-	11	20	pF	



Dated : 07/12/2002





FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SC1383 / 2SC1384

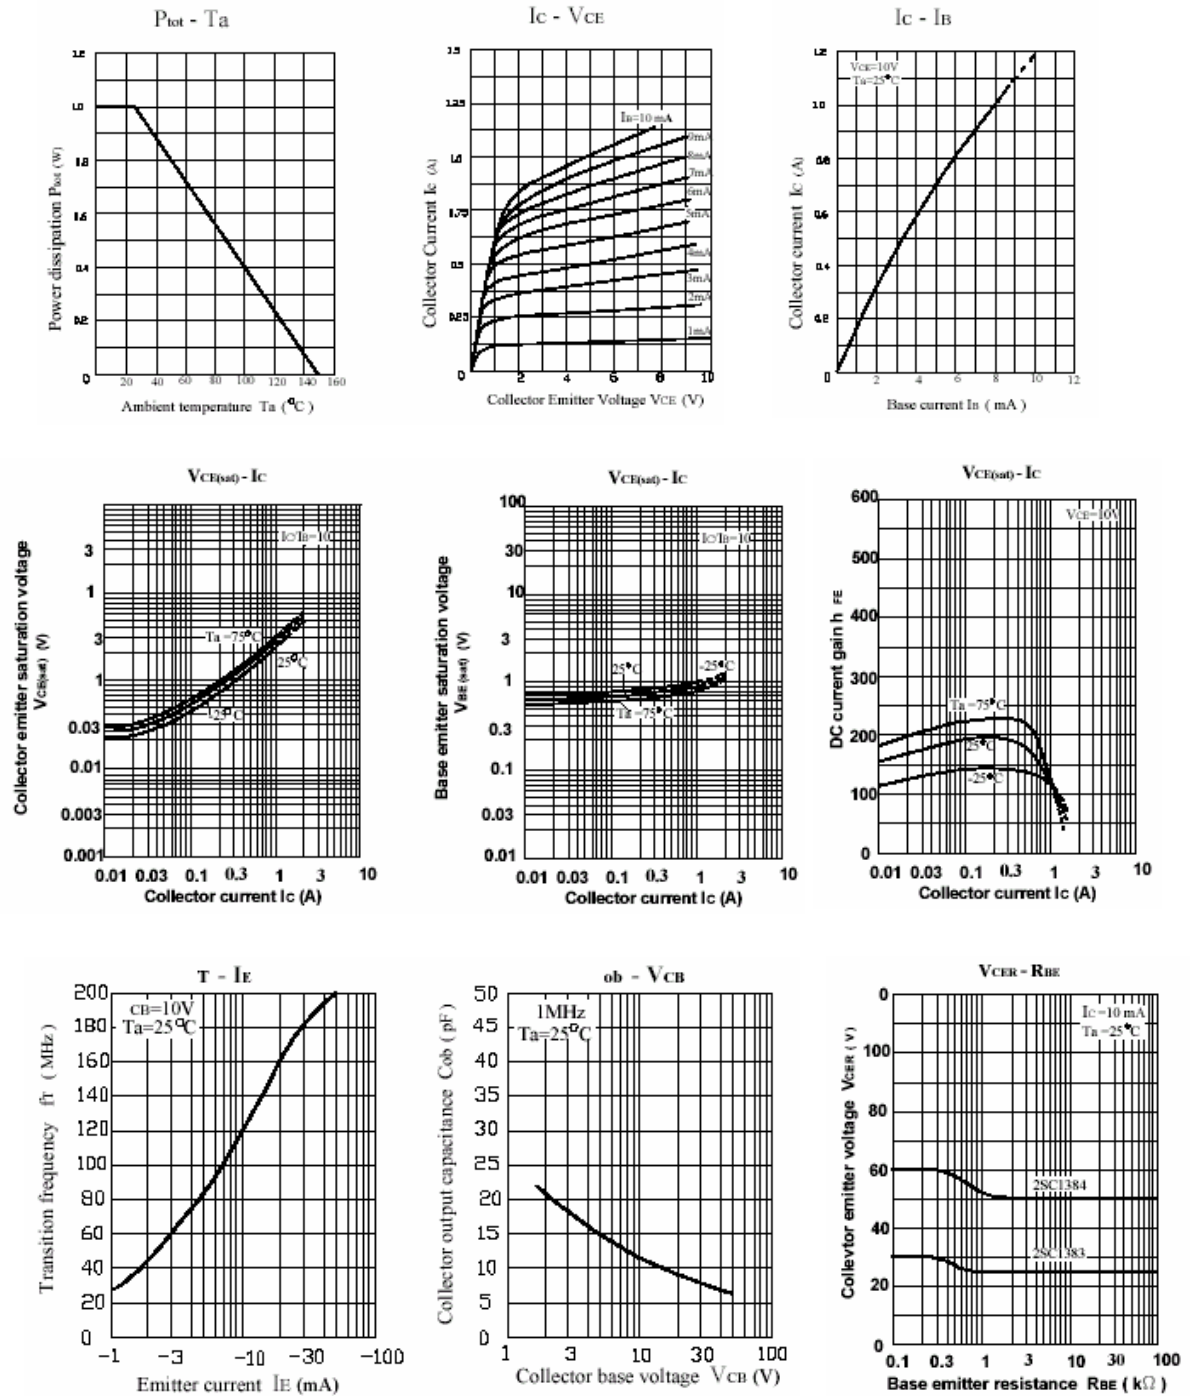

Dated : 07/12/2002






FUKUCOM COMPANY LTD.

福 靈 有 限 公 司

FLAT P, 3/F., EVEREST INDUSTRIAL CENTRE, 396 KWUN TONG ROAD,
KWUN TONG, KOWLOON, HONG KONG.

TEL: 852-2790 0314 FAX: 852-2790 0206

ST 2SC1383 / 2SC1384

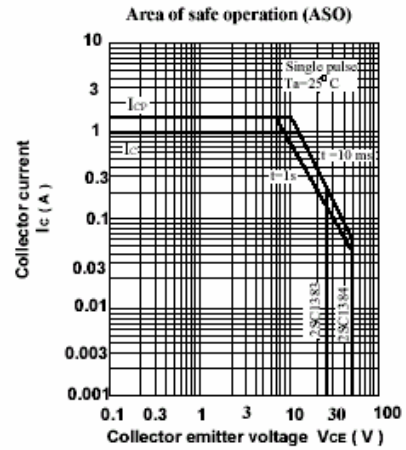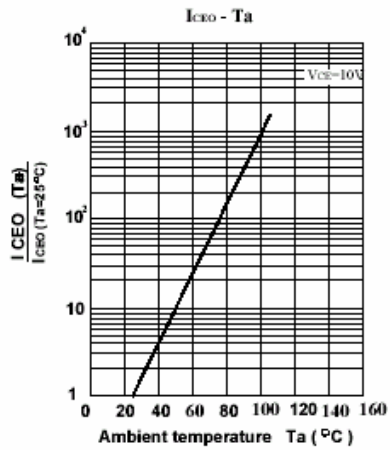

Dated : 07/12/2002